



Installation Guide

Gateway G31



Welcome to akubela Home!

This installation guide will walk you through installing akubela Gateway G31 and putting it into pairing mode.

Contents

Before We Start	2
In The Box	4
Device Overview	5
Specification	6
Indicator	7
Getting Started	10
Factory Reset	12
Need Help?	13

Before We Start

You first time installing akubela Gateway G31 may take up to 10 minutes.


You'll get faster after each installation.




Warning

Keep the device and all its parts out of the reach of children. The small parts or accessories contained may be a choking hazard to them.


In the Box




Gateway G31 x1




Mounting Plate x1



Double-Sided Tape x2



Type-C Cable x1




ST3x20mm Phillips Self
Tapping Screw x3




Drywall Anchor x3


Device Overview

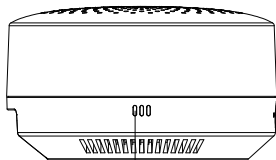

Buzzer

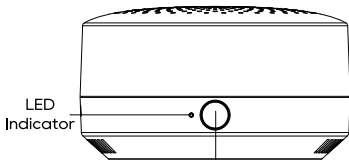

Button



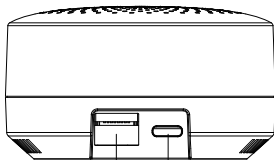


Ethernet Port

Type-C

Specification

*Unit of length: Millimeter(mm)




Indicator

LED Indicator	Description
Solid Yellow Light	Upgrading
Yellow Light Flash	Starting Up / Pairing
Stay Off	Working Normally
Green Light Flash Slowly	AP Mode Activated
Green Light Flash Quickly	Connecting to the Home
Green Light Flash Once	Connected Device Triggered/Controlled

Placing Gateway G31 on a Table for Direct Use

- 1.Place the G31 on a flat and stable surface,such as a desk or table.
- 2.Connect the device to a USB wall charger using the provided USB cable.
Make sure that the wall charger has a DC output of 5V/1A.

Mounting Gateway G31 with Double-sided Tape

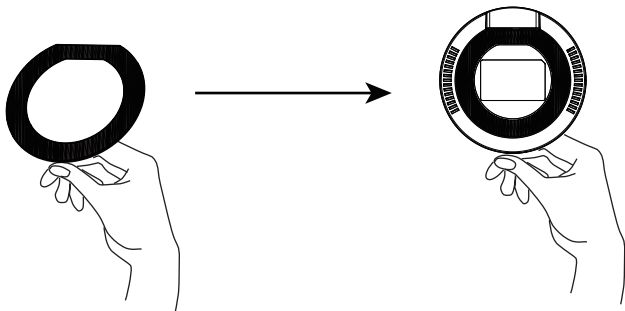

- 1.Make sure the surface is clean and dry before applying adhesive.
- 2.Apply the included 3M double-sided tape to the bottom of the G31.
- 3.Remove the other backing.
- 4.Press the device firmly with both hands for 30 seconds to secure it in place.



Warning

Do not install the device in wet or hot environments. Keep it away from water, liquids, fire, heat sources and direct sunlight.

Keep your gateway away from electronics with strong interference, such as microwave ovens, TVs, and refrigerators.



Getting Started

1 Power on

Connect the gateway to a power supply.

2 Connect to network

- Wired network: Connect the gateway to the router.
- Wi-Fi: Press and hold the button for 5 seconds until the green indicator flashes slowly and the buzzer beeps once. The gateway's AP hotspot will be turned on to allow other devices to join.

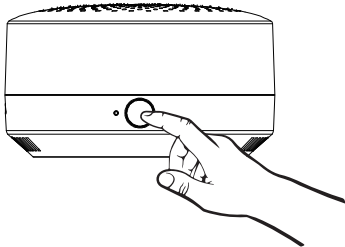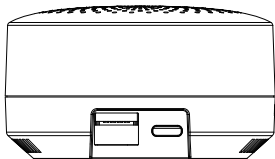

3 Set up in App


Download and log into the BelaHome app, then add the gateway into your home's akubela system.



Scan to download the BelaHome APP

Factory Reset

1. Press the button 5 times within 2 seconds to enter the configuration mode, indicated by a yellow-flashing indicator.
2. Hold the button for 5 seconds. The red light stays on during this time.
3. After 5 seconds, the buzzer beeps once, and the light turns to slow-flashing green.
4. The gateway has its network settings reset and is ready for a new setup.

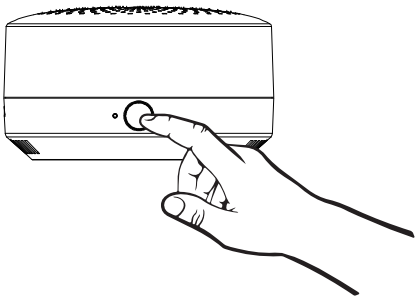

Congratulations!

You are done with the installation!

Need Help?

For help or more assistance,
contact us at: <https://ticket.akuvox.com/>

For more videos, guides, and additional product
formation,
visit us at: <https://knowledge.akuvox.com>

