

Perfect choice for Access Control

Akuvox's E16C is a safe and convenient commercial-grade device for both intercom & access control. With the latest deep learning algorithm and dual cameras liveness detection technology, E16C can be deployed in the field for community and commercial applications, for the implementation of smart access control.

At a Glance

- Plastic body with 5inch touchscreen;
- Linux operation system;
- Wide-angle camera: 62° (H), 36° (V);
- Two-way audio communication over IP networks with Echo Cancel feature;
- Multi-way access feature including: Face, EM/Mifare Card, PIN, BLE & QR code;
- Surface-mounted;
- Complies with SIP & ONVIF;



Anti-epidemic Function

- Mask Detection
- Body Temperature Detection

[Only E16C(MD01) & E16C(MD02) support]

Physical & Power

- | | |
|--|--|
| • Body Material: Plastic | • Ethernet Port: RJ45, 10/100Mbps adaptive |
| • Display: 5 Inch IPS LCD, 1280x720 | • BLE: Support |
| • Camera: 2M pixels, WDR | • 802.3af Power-over-Ethernet |
| • Wiegand Port: 1ch input/output(selectable) | • 12V DC Connector (if not using PoE) |
| • RS485 Port: Support | • Tamper Alarm: Support |
| • RF reader: 13.56MHz&NFC (only Android) | • Installation: Wall-mounted |
| • Relay Out: 1 | • Dimension (HxWxD): 192x88x23.8mm |
| • Inputs: 1 | • IP Level: IP65 |
| | • Working Humidity: 10~90%, no condensing |
| | • Working Temperature: -20°C ~ +55°C |

Identification

- Identification Mode: Face, PIN, NFC, EM/Mifare Card, BLE & QR code
- Identification Speed: < 200ms

Capacity

- Face Capacity: 20,000
- Card Capacity: 20,000
- Event Log: 50,000


Forehead Temperature Measurement

- Only E16C(MD02) support
- Distance: 0.3M ~ 1M
- Accuracy: 0.1°C
- Deviation: $\pm 0.3^{\circ}\text{C}$
- Range: 34°C ~ 45°C

Wrist Temperature Measurement

- Only E16C(MD01) support
- Distance: 1cm ~ 5cm
- Accuracy: 0.1°C
- Deviation: $\pm 0.3^{\circ}\text{C}$
- Range: 34°C ~ 45°C

Dimensions

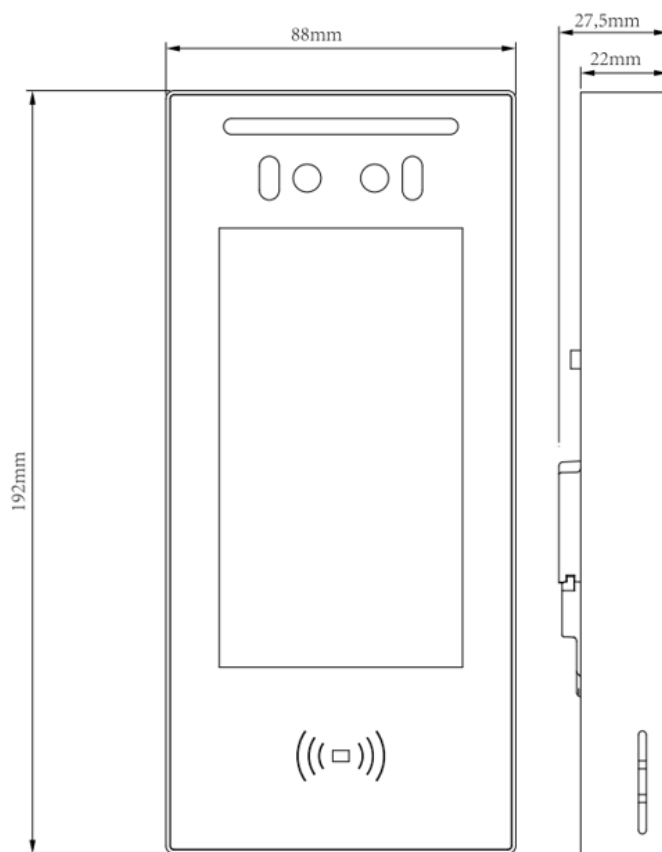

Application

