

RG-EST100-E

2.4 GHz Dual-stream 500 m Wireless Bridge



Highlights


- RG-EST100-E can easily transmit data from 500 m away in real time
- Factory-free configuration, without complex alignment
- IP55 Weatherproof, -30°C~60°C guarantee stable operating at outdoor or elevator environment
- Support maximum 10 x 3MP cameras loading at 100 m, 5 x 3MP cameras loading at 500 m

Designed for Short Distances PTP

Unique Value for CCTV Scenario

RG-EST100-E

Performance Scenarios

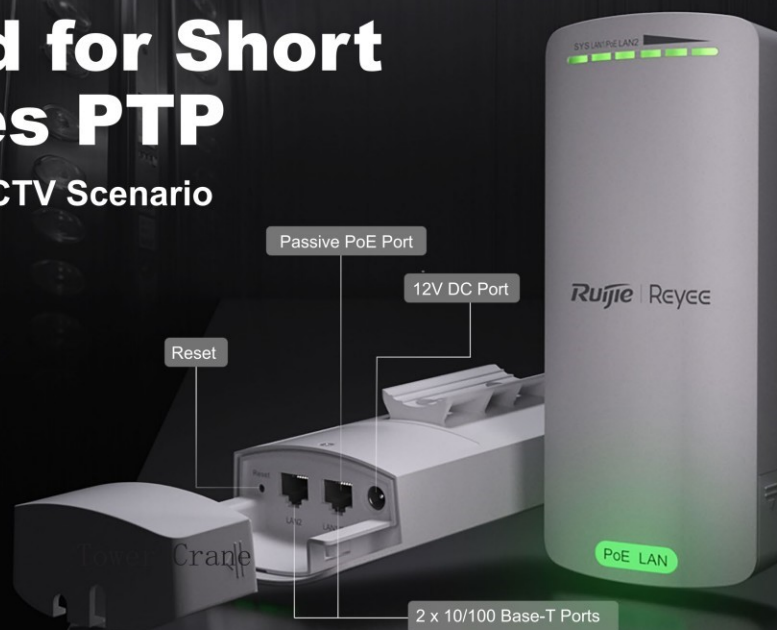

Designed for Short Distances PTP



Unique Value for CCTV Scenario

RG-EST100-E

Performance Scenarios




Highlight Features

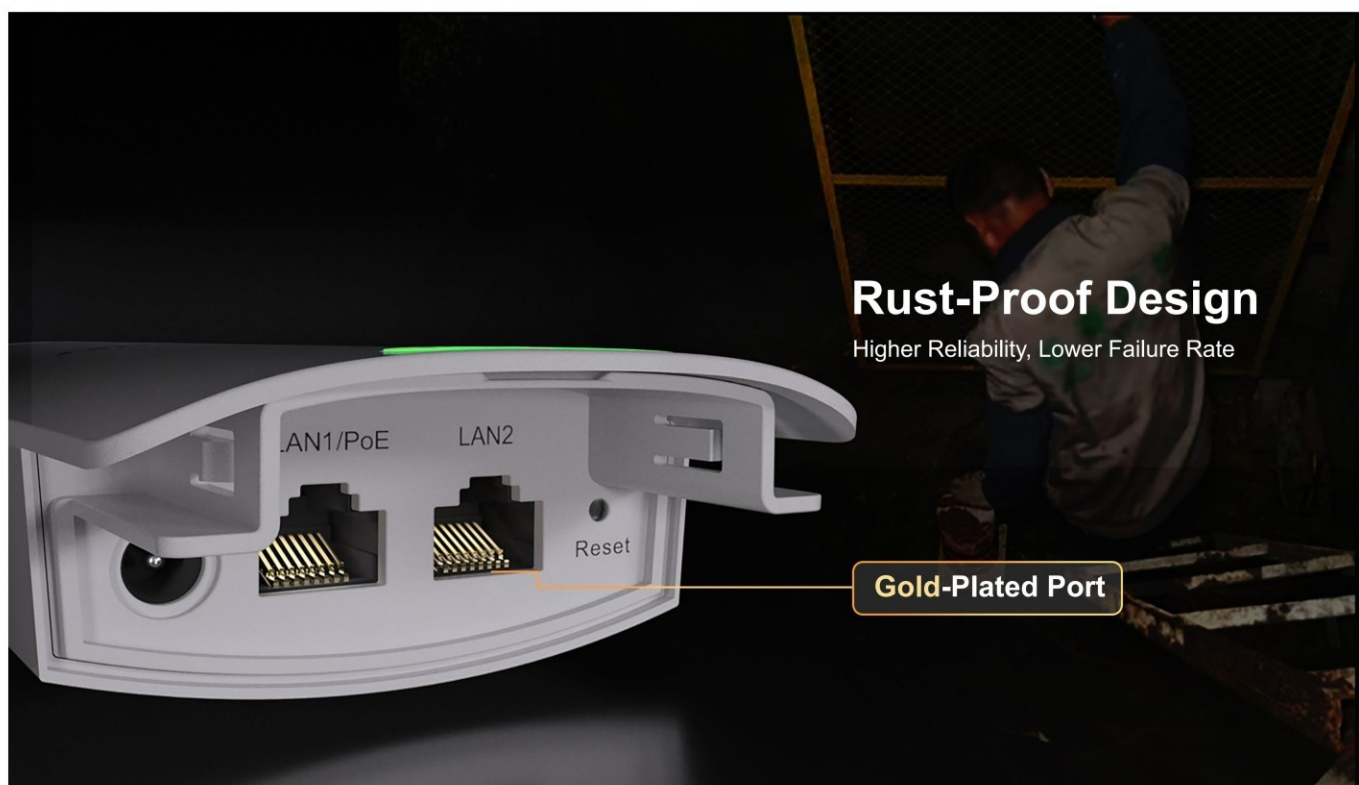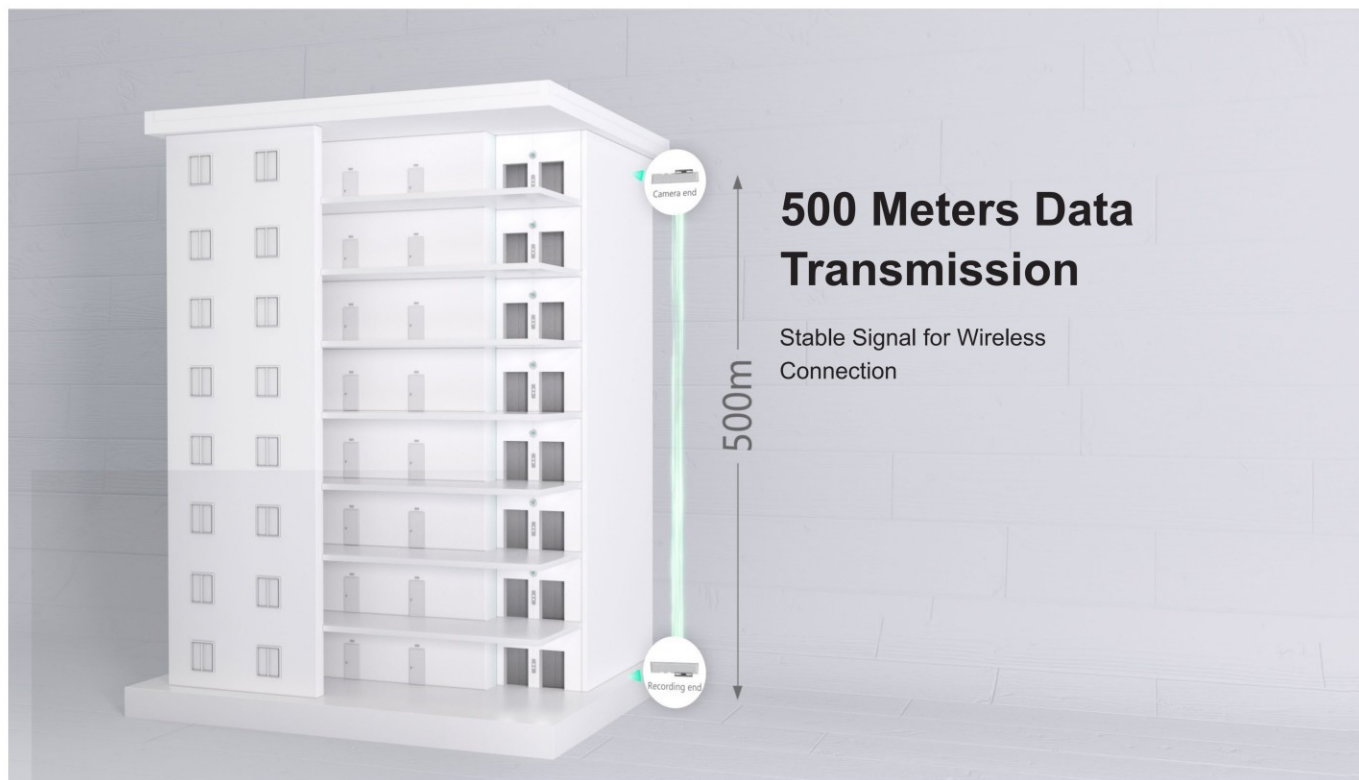

Highlight Features



Fluorescent Stickers
Easy Recognition in the Dark

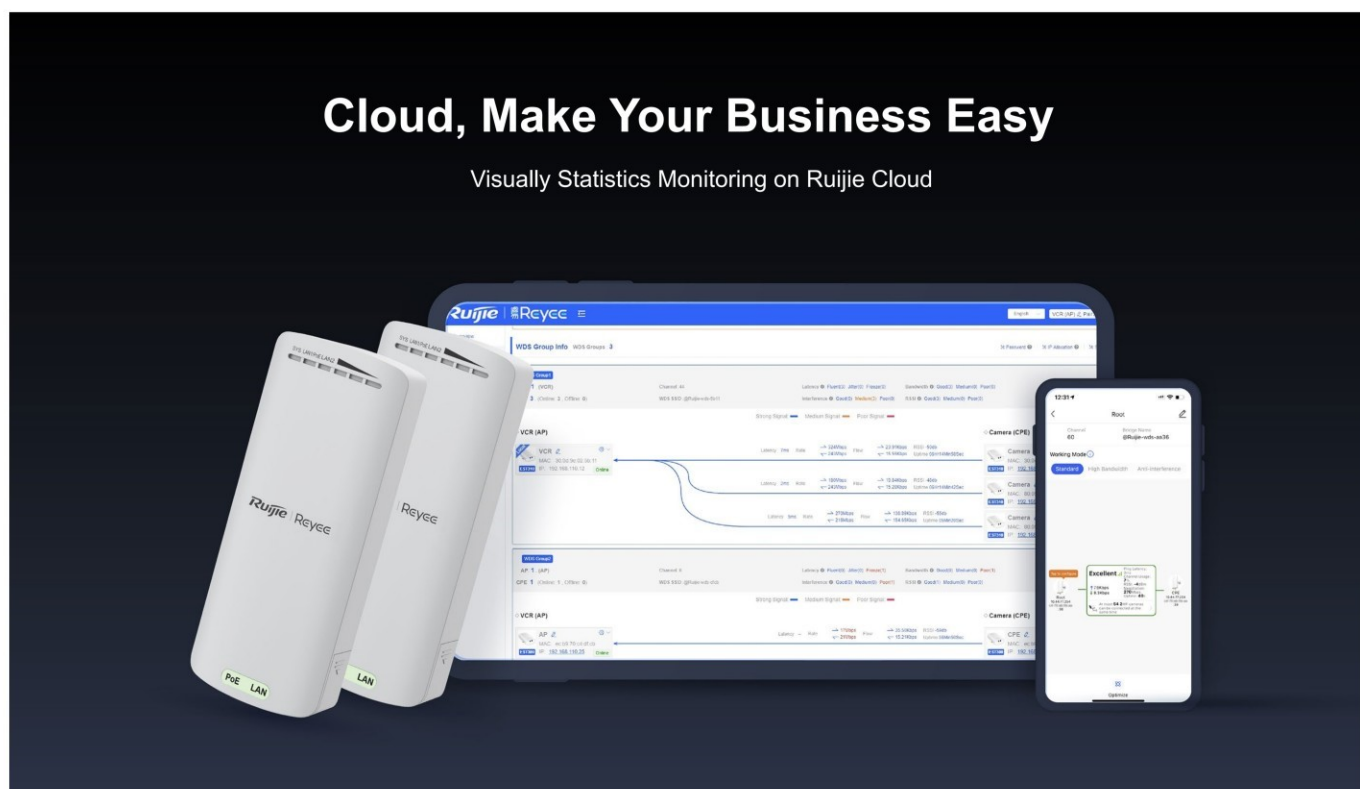

Cloud, Make Your Business Easy

Visually Statistics Monitoring on Ruijie Cloud

/ Product Information

Model	RG-EST100-E
Product Type	Wireless bridge
Accessory	No

/ Hardware Specifications

Model	RG-EST100-E
Antenna	
Antenna	2.4 GHz: 2 x 2 Built-in directional antenna, horizontal: 70°, vertical: 70°
Antenna gain (2.4 GHz)	8 dBi
Antenna horizontal orientation	70°
Antenna vertical orientation	70°
Port Specifications	
Number of fixed LAN ports	2
Number of 10/100BASE-T ports	2
Reset button	1
LEDs	1 x system status LED 2 x Ethernet port LEDs 3 x signal status LEDs
Power Supply and Consumption	

Hardware Specifications

Model	RG-EST100-E
Power supply	Power supply options: • DC power adapter • Passive PoE injector
Power input	DC power adapter: • Rated input voltage: 100 V AC to 240 V AC, 50 Hz to 60 Hz • Rated input current: 0.3 A Output: • Rated output voltage: 12 V DC • Maximum output current: 1 A Passive PoE injector: • Rated input voltage: 12 V DC • Rated input current: 1 A Output: • Rated output voltage: 12 V DC • Maximum output current: 1 A
Number of PoE In ports	1
Local power supply	Yes, one DC power connector (12 V, 1 A)
Dimensions of the DC connector	Outer Diameter: 5.50 mm $\pm$ 0.05 mm (0.22 in. $\pm$ 0.002 in.) Inner Diameter: 2.10 mm $\pm$ 0.05 mm (0.08 in. $\pm$ 0.002 in.) Depth: 9 mm (0.35 in.)
Maximum power consumption	5 W

Hardware Specifications

Model	RG-EST100-E
Applicable Scenarios	
Applicable Scenarios	CCTV
Certification and Regulatory Compliance	
Safety compliance	EN62368-1
EMC	EN 55032
	EN 55035
	EN 61000-3-3
	EN 61000-3-2
	EN 301489-1
	EN 301489-3
Certification	EN 301489-17
	CE, FCC, CB, ISED, cTUVus
Dimensions and Weight	
Weight	0.14 kg (0.31 lbs) (without packaging materials)
Shipping weight	0.3 kg (0.66 lbs)
Product dimensions (W x D x H)	68.7 mm x 42 mm x 165.5 mm (2.70 in. x 1.65 in. x 6.52 in.)
Package dimensions (W x D x H)	224 mm x 208 mm x 92 mm (8.82 in. x 8.19 in. x 3.62 in.)
Color	Elegant white
Wi-Fi Radio	

Hardware Specifications

Model	RG-EST100-E
Radio design	Single-radio 2 spatial streams • Radio 1: 2.4 GHz, 2 spatial streams: 2 x 2, MIMO
Operating band	IEEE 802.11b/g/n: 2.400 GHz to 2.483 GHz Note: Available bands vary with countries and regions. To use the preceding frequency bands, ensure that your country or region supports these frequency bands. For details, see Channels for Countries & Regions (official website link to be added).
Wi-Fi standard	Wi-Fi 4 (IEEE 802.11n) standard, compatible with IEEE 802.11b/g standards
2.4 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11b/g/n)
2.4 GHz channel width	Auto/20/40 MHz
Transmission rate	Maximum wireless data rate: 300 Mbps • Radio 1: 2.4 GHz, 300 Mbps
Maximum transmit power	Frequency bands and maximum Effective Isotropic Radiated Power (EIRP): Note: Country specific restrictions apply. European Union & United Kingdom: 2400–2483.5 MHz, EIRP ≤ 20 dBm Myanmar:

Hardware Specifications

Model	RG-EST100-E
	2400–2483.5 MHz, EIRP $\leq$ 23 dBm Thailand: 2400–2483.5 MHz, EIRP $\leq$ 20 dBm Indonesia: 2400–2483.5 MHz, EIRP $\leq$ 36 dBm Egypt: 2400–2483.5 MHz, EIRP $\leq$ 20 dBm (Indoor use only) Vietnam: 2400–2483.5 MHz, EIRP $\leq$ 23 dBm
Maximum transmit power (2.4 GHz)	Combined power: 23 dBm (single stream power: 20 dBm) Note: The transmit power varies according to regulations in different countries and regions.
Receive sensitivity	802.11b: -91 dBm (1 Mbps), -88 dBm (5 Mbps), -85 dBm (11 Mbps) 802.11g: -89 dBm (6 Mbps), -80 dBm (24 Mbps), -76 dBm (36 Mbps), -71 dBm (54 Mbps) 802.11n: -83 dBm@MCS0, -65 dBm@MCS7, -83 dBm@MCS8, -65 dBm@MCS15
Modulation	802.11b: BPSK, QPSK, CCK 802.11g/n: BPSK, QPSK, 16-QAM, 64-QAM
Highest QAM order	64

Hardware Specifications

Model	RG-EST100-E
Environment and Reliability	
Mounting options	Wall/Pole
Operating temperature	-30°C to +60°C (-22°F to +140°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Operating humidity	5% RH to 95% RH (non-condensing)
Storage humidity	5% RH to 95% RH (non-condensing)
Altitude	Operating altitude: -500 m to +5,000 m (-1,640.42 ft. to +16,404.20 ft.) Storage altitude: -500 m to +5,000 m (-1,640.42 ft. to +16,404.20 ft.)
MTBF	400,000 hours (about 45 years)
Cooling	Natural cooling
IP rating	IP55
ESD protection	Standard test: contact discharge=8 kV, air discharge=15 kV, Class B
Surge protection	Service port: ±6 kV for common mode Power connector: ±4 kV for common mode and ±2 kV differential mode
System Specifications	
CPU	Single-core processor, 575/580 MHz clock frequency
Flash memory	8 MB

Hardware Specifications

Model	RG-EST100-E
RAM	64 MB DDR2

Software Specifications

Model	RG-EST100-E
Ethernet Switching	
Interface rate	10/100 Mbps auto-negotiation
VLAN	Yes
Link aggregation	No
IP Service	
IPv4 ping	Yes
IPv4 traceroute	Yes
DHCP server	Yes
DHCP client	Yes
Basic Configurations	
eWeb login with the username and password	Yes
Local upgrade	Yes
Configuration backup	Yes
System language	Chinese (Simplified), English
System time settings	Yes
WLAN	
BaseStation/CPE mode switching	Yes
Enhanced one-to-many transmission (TDMA)	No
Bridge SSID hiding	Yes

Software Specifications

Model	RG-EST100-E
WPA2-PSK encryption	Yes
WPA-PSK encryption	No
WPA/WPA2-PSK encryption	No
Recommended channel	Yes
Bridge speed test	Yes
5 MHz offset	No
Random security key upon configuration delivery	No
Configuring a security key for network-wide bridges	Yes
Configuring a security key for a single bridge group	Yes
Configuring a security key for a single bridge	Yes
Bridge SSID, channel, and power configuration	Yes
WMM	Yes
Recommended PTMP connections	1
Maximum bridge distance	0.5 km (0.31 miles)
One-touch pairing	Yes

Software Specifications

Model	RG-EST100-E
Maximum effective distance of one-touch pairing	20 m (65.62 ft.)
Bridge performance	60 Mbps/100 m (328.08 ft.) (HT20) 30 Mbps/500 m (0.31 miles) (HT20)
RSSI	- 58 dBm/100 m (328.08 ft.) - 68 dBm/500 m (0.31 miles)
Recommended number of connected cameras (3 Mbps)	10/100 m (328.08 ft.) 5/500 m (0.31 miles)
Recommended number of connected cameras (4 – 5 Mbps)	6/100 m (328.08 ft.) 3/500 m (0.31 miles)
Recommended number of connected cameras (6 – 7 Mbps)	3/100 m (328.08 ft.) 1/500 m (0.31 miles)
Recommended number of connected cameras (7-8 Mbps code streams)	3/100 m (328.08 ft.) 1/500 m (0.31 miles)
Real-time signal strength	Yes
Optimal signal strength	Yes
Active/Standby channel	No
Restoring to the active channel	No
Maximum number of devices on the SON	200
Network Management and Monitoring	

Software Specifications

Model	RG-EST100-E
SON	Yes
AI heatmap	No
Camera detection	No
Network-wide management SSID configuration	Yes
Network connection through the management SSID	No
Ruijie Cloud management	Yes
Restarting devices through Ruijie Reyee App	Yes
SNMPv1, v2c, and v3	No
Fault diagnosis	Yes Note: support for network tools (ping, traceroute, and nslookup), fault alarms, and fault collection
Restart cause prompt	Yes
Disconnection cause prompt	No
Cloud alarms on DFS signal detection	No
Security	
Broadcast storm control	Yes

Package Contents

Model	RG-EST100-E
Accessories	
Cable tie	4
Power adapter	2 Note: 12 V/1 A DC power adapter
PoE injector	2
Mounting Template	1
Manual	
User Manual	1
Warranty Card	1
Device	
Device	2

Ruijie | ReYee

 **R**edefine **y**our **e**asy network



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>