



sip proxy application

1. Insure your system time is right , upgrade to our 3.0.2 software of device,then you can use that proxy feature.
2. before to use the proxy,use our ippbx to ping those domain ,and then find one reponse time **shortest** server.we have deployed 4 server already at no .

sip.zycoo.com #china
us.zycoo.com #American
eu.zycoo.com #England
sg.zycoo.com #Singapore

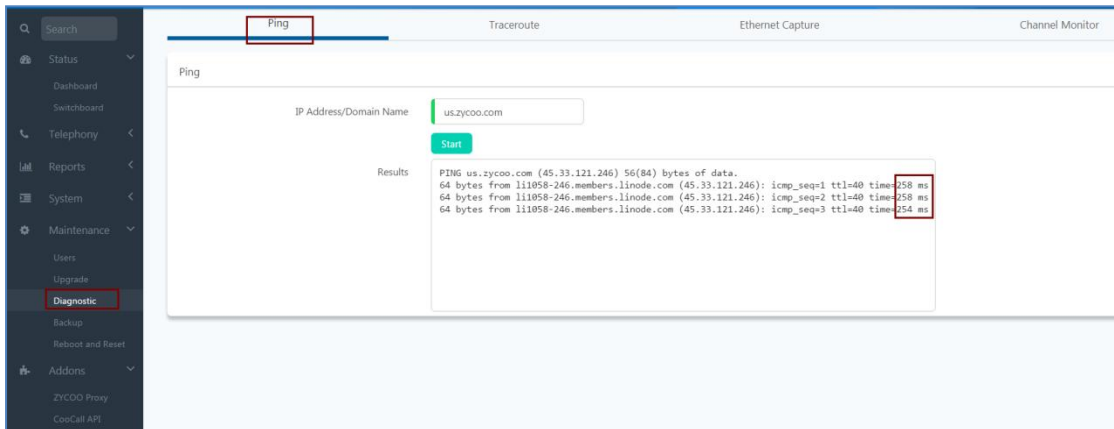


3. try to input all information and then select that you have tested with fast server with ping tool

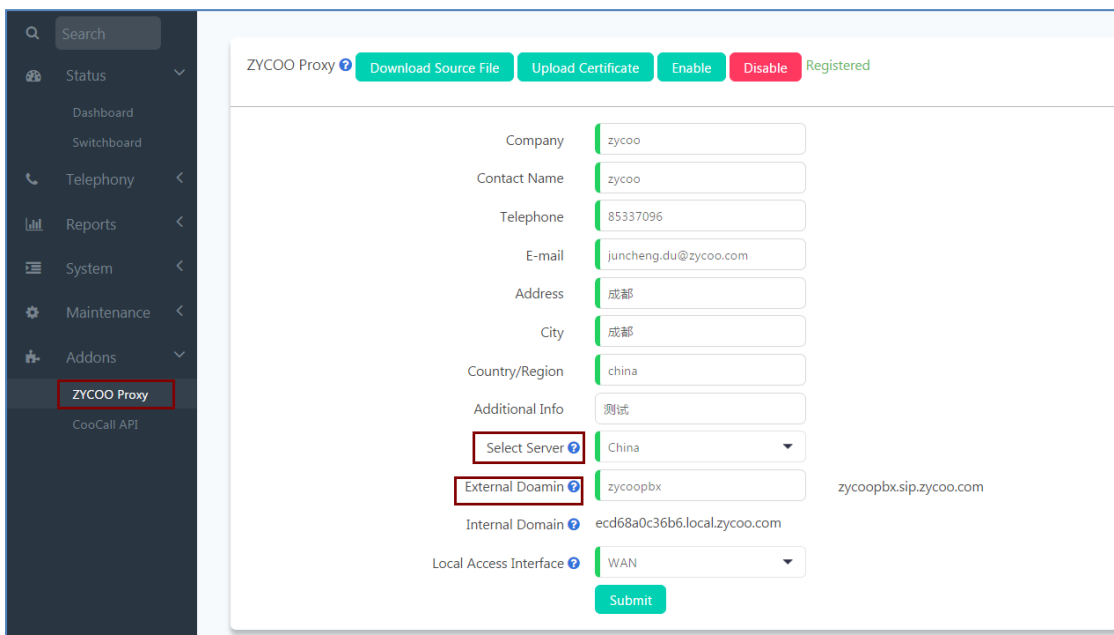

select server:this is our proxy server

external domain:you can input your company name like zycoo,zycoo0101 and it is better that is only letter and digits without other special letters.

4. download the Source file ,and send to our sales,then we will send the proxy licence to you,and once you upload it will show register then you can start to use it .
5. download the coocall from the app store ,and then enable the extension with Remote extension,disable NAT

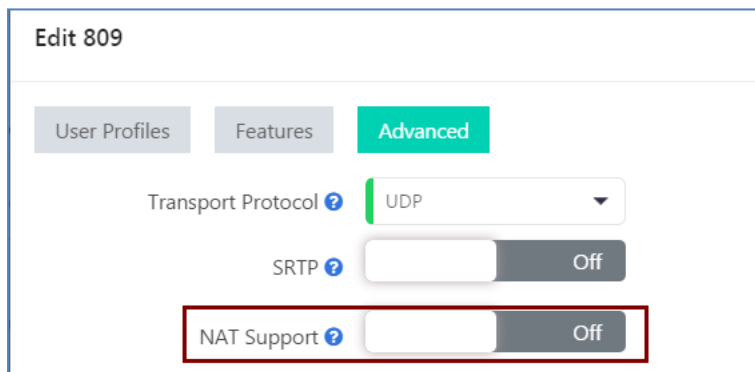


Advanced

Transport Protocol

SRTP Off

NAT Support Off

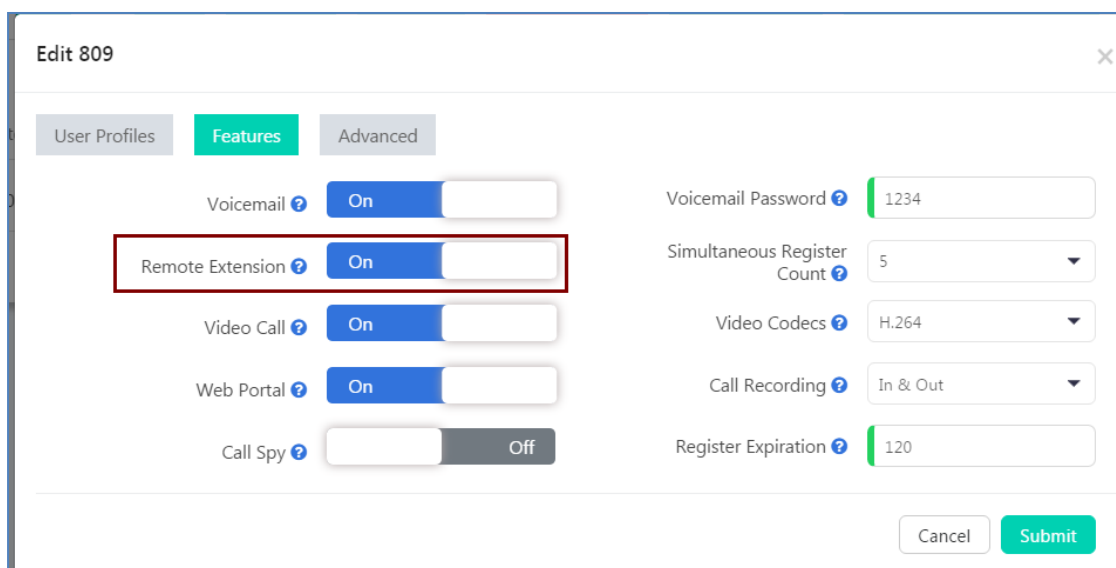

Features

Voicemail On

Remote Extension On

Video Call On

Web Portal On

Call Spy Off

Voicemail Password

Simultaneous Register Count

Video Codecs

Call Recording

Register Expiration

Cancel Submit

scan on your mobile and it can register,and if you want to use the coocall at phone lock status ,pls dial *19 on coocall directly to enable push feature.

for much more information ,you can refer our coocall usage .

6. if you want to use your desktop phone to regiter ,pls noted that it is 5160 port.

The screenshot displays the Zycoo web interface for configuring a SIP line. The top navigation bar includes the Zycoo logo, language selection (English), and user controls (Logout, admin). Below this is a secondary navigation bar with tabs for Information, Account, Configurations, Upgrade, Auto Provision, and Tools. The left sidebar lists system management options. The main configuration area is for 'Line SIP 2'. The 'Basic Settings' section shows the line is 'Registered' and includes fields for Username (809), Display name (809), Authentication Name (809), Authentication Password (masked), Server Name, and an 'Activate' checkbox. The right-hand side of the configuration includes fields for SIP Proxy Server Address (zycoopbx.sip.zycoo.com), SIP Proxy Server Port (5160), and several 'Outbound proxy' fields for address and port.

pls note:

- 1.the sip registrar proxy server udp port is 5160
 - 2.the sip proxy server address is the external domain of Zycoo proxy menu.
- you have any query,pls dont hesitate to send email support@zycoo.com

zycoo support team

20180918